



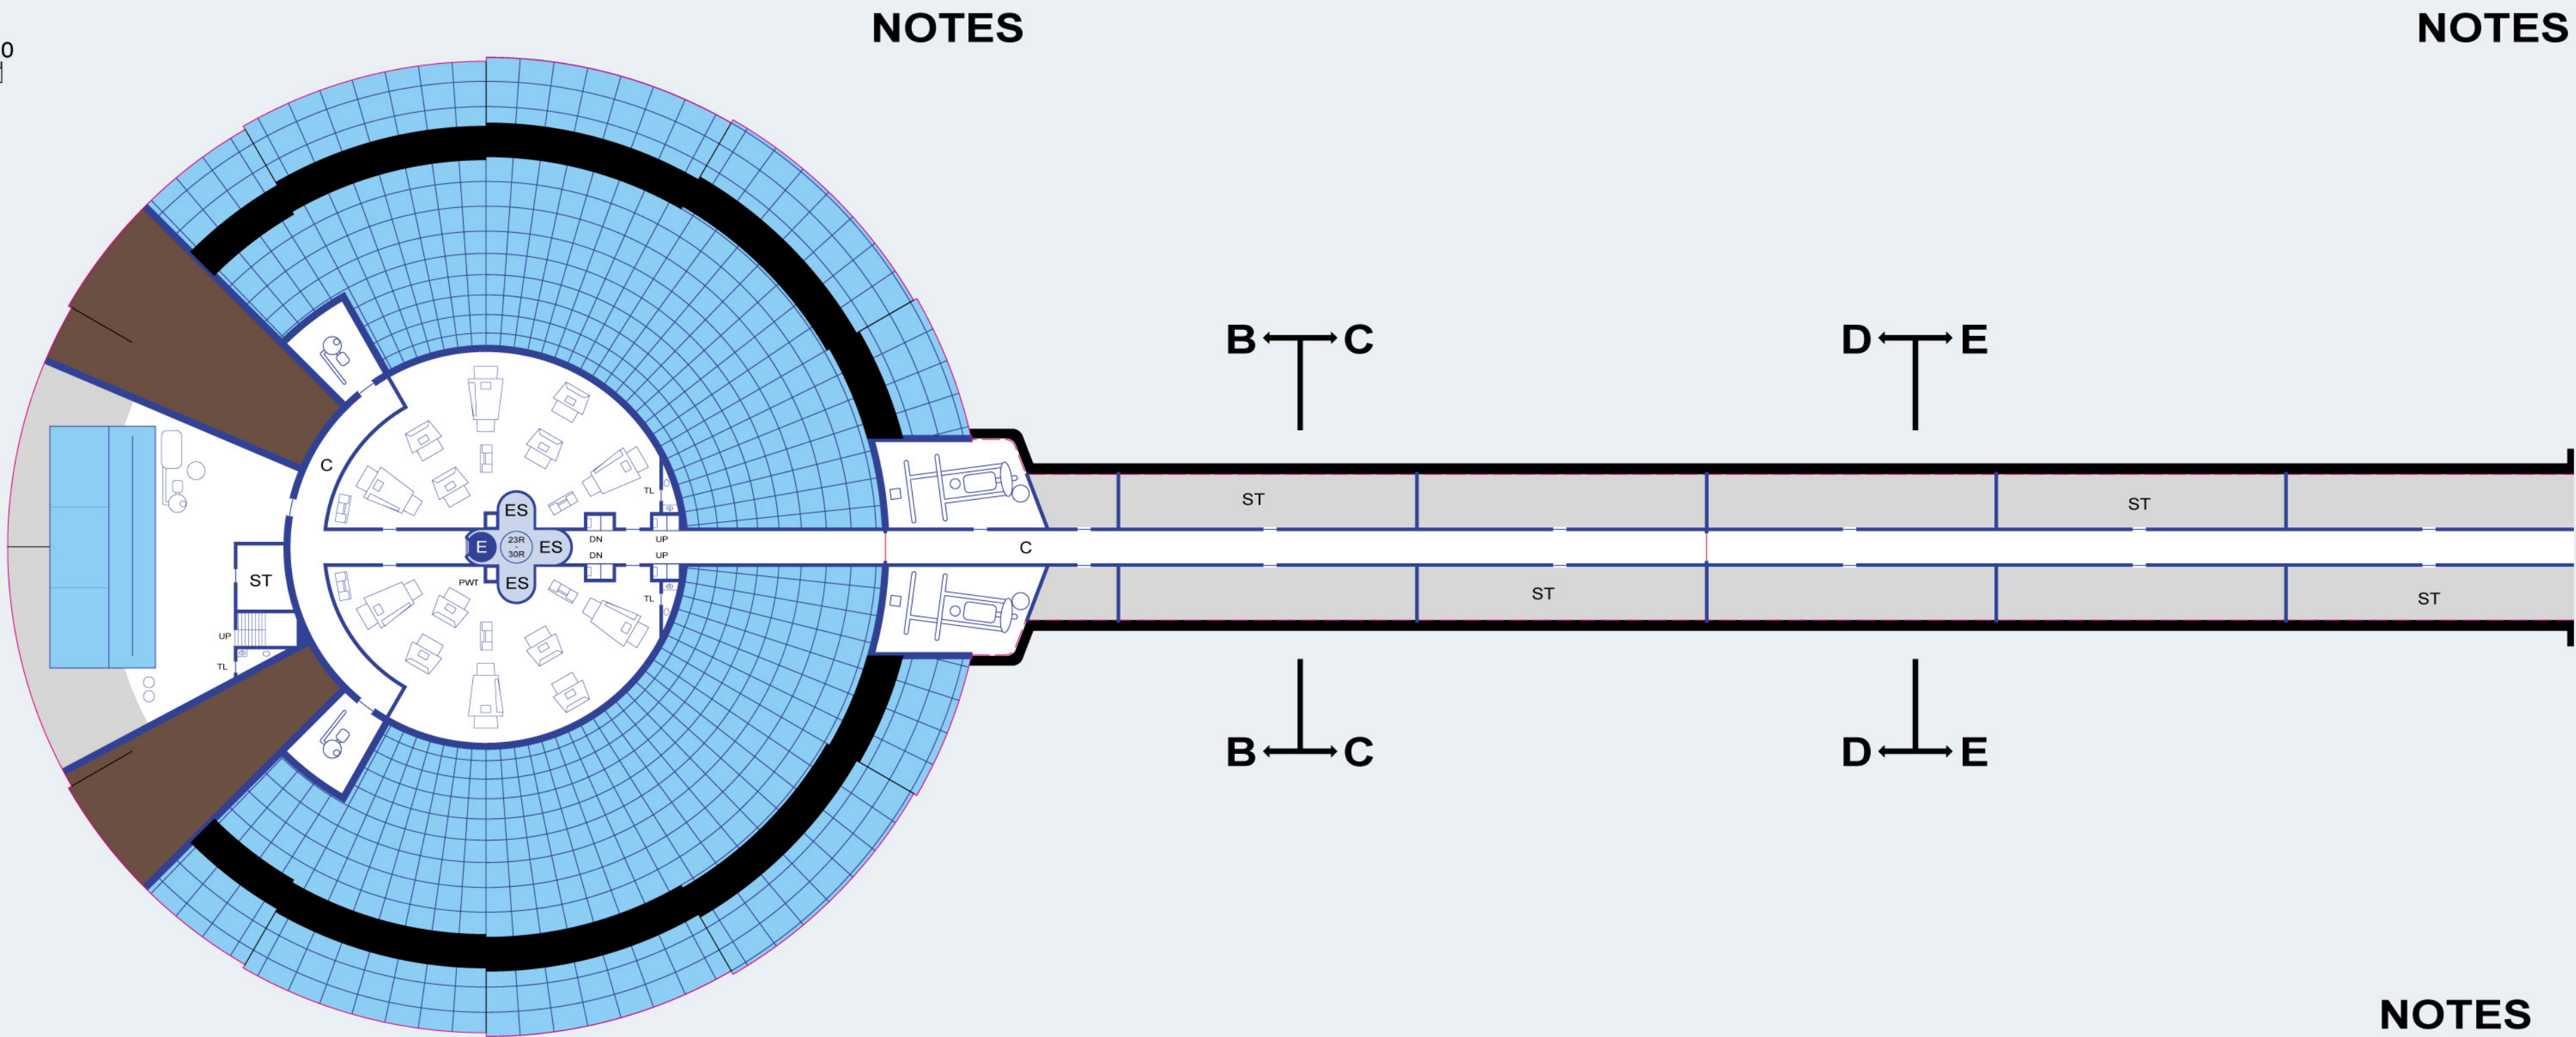


DECK 30R: POOL BOTTOM / FABRICATION / FRESH WATER

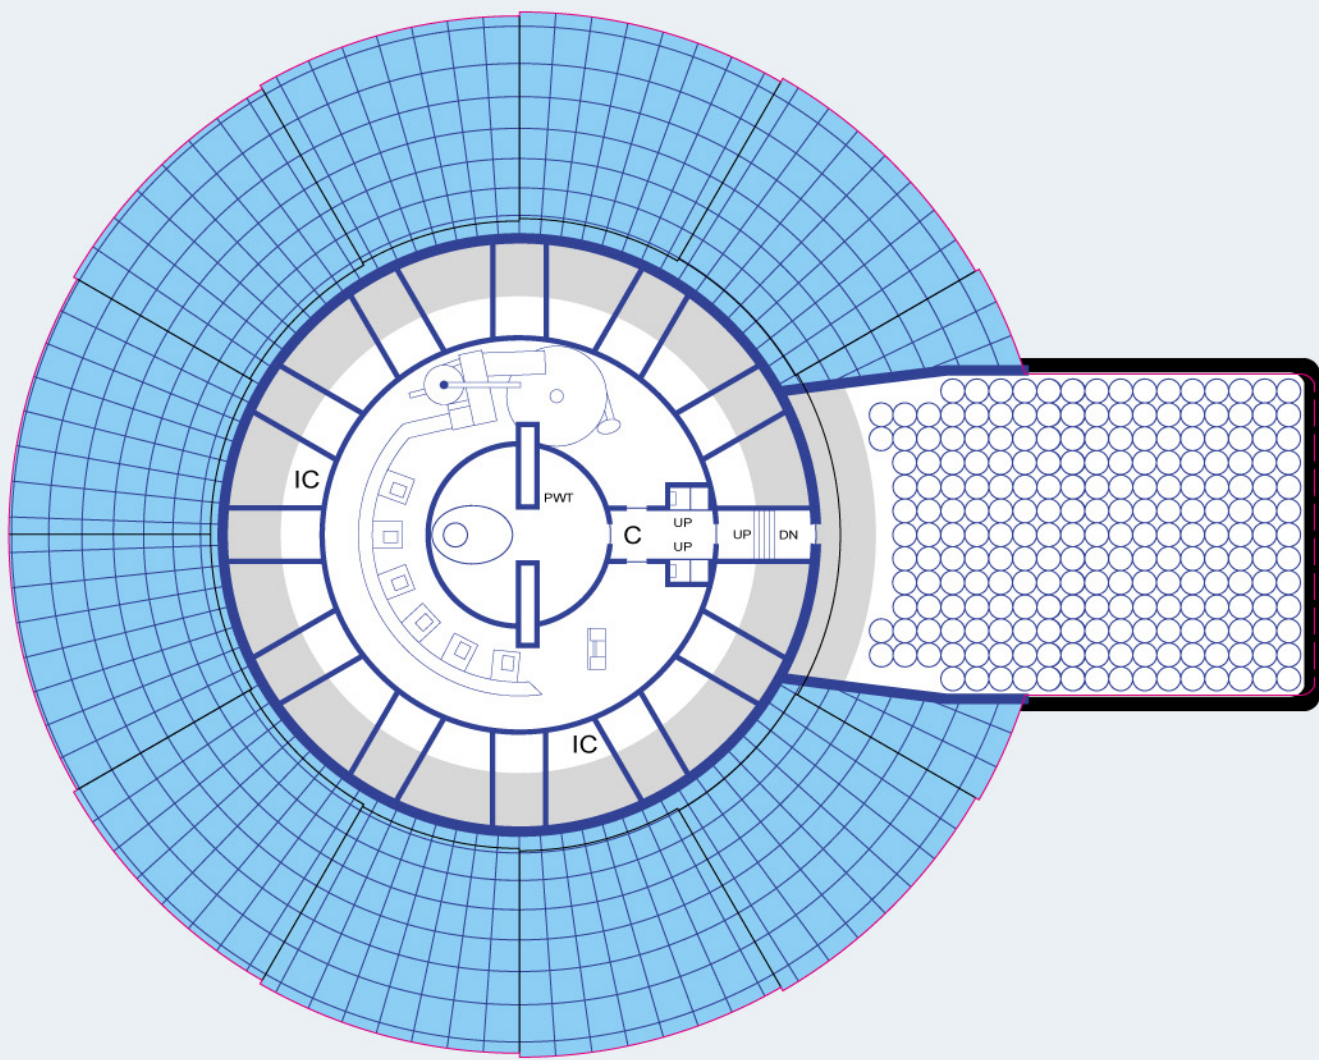

DECK 31R: FRESH WATER / SEWAGE TREATMENT / BATTERIES

OLYMPIC-SIZED SWIMMING POOL



FOR COMPARISON, AN OLYMPIC-SIZED SWIMMING POOL IS 50 METERS (164 FT) LONG.

DECK 30R
The Swimming Pool bottom is located at the front of this deck. Equipment to maintain the Pool is also located here.
The soil for the 2 Natural Habitats is located on either side of the Pool bottom. The secondary Fresh Water Tank surrounds this deck and Deck 31R (below). A small Fabrication Facility is located in the middle of the deck.

Storage Rooms along the arm are limited because of the curvature of the hull.

DECK 31R
The secondary Fresh Water Tank surrounds this deck and Deck 30R (above).

As on Deck 27R, the Clamshell Structural Support Beams are located in the ring-shaped Inspection Corridor. Within this corridor was the automated machinery for deploying the clamshell; that machinery has since been removed and re-purposed.

The ring-shaped Inspection Corridor surrounds a small Sanitary Waste Recovery System. It serves all the decks above via the Piping and Wiring Trunk (which includes sewage control).

A single Phaser is located in the exact center on the underside of the hull.

More Batteries are located at the rear, in the rectangular housing.